


## Configuration of SEEONE VIEW

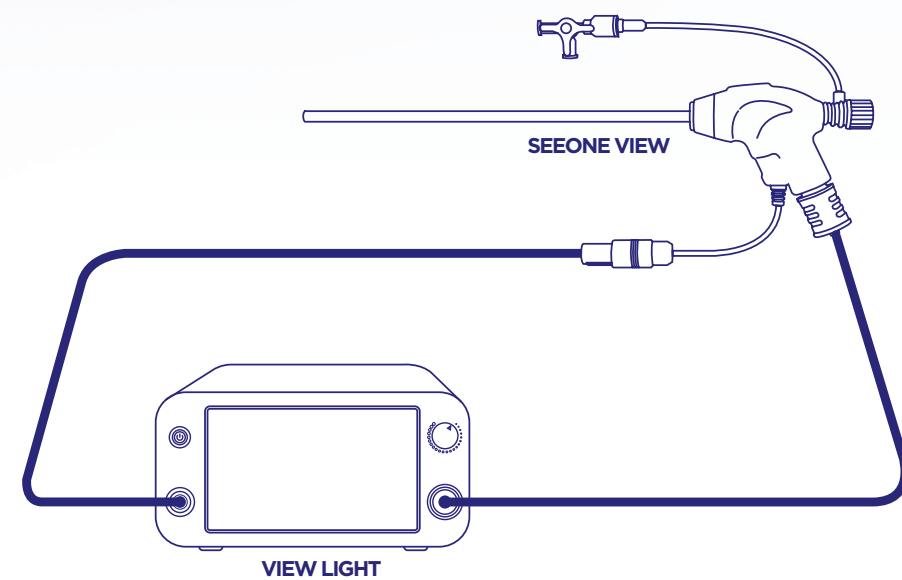

## SEEONE VIEW

Epidural Endoscopic Catheter System

### View Light Specification

Type		Endoscopy Light Sources Device
Size		330X400X170
Power Supply	Voltage	100-240VAC
	Frequency	50/60Hz
LED	Power	60W (15A)
	CCT range	6500k (Cold white)
	Brightness	0-100
LCD	Resolution	10.1inch (1200x800 pixel)
Camera	Resolution	160k (400x400 pixel)
	Video	2m
Cable	Fiber optic	2m
	Power	1.5m
Save		USB 2.0



## SEEONE VIEW


Epidural Endoscopic Catheter System

- Microendoscopic camera with high resolution & 160K
- Accurate treatment with visualization
- Minimally invasive

# SEEONE VIEW Epidural Endoscopic Catheter System

SEEONE VIEW is a micro-endoscope system with 160K high-definition camera, working channel and optical fiber for LED light.

It provides real-time images using the high-definition camera by delivering light supplied from light source through optical fiber. Therefore, the largest benefit of SEEONE VIEW is that users can directly check the region of lesion and make a precise diagnosis and treatment. Moreover, drugs can be injected through the working channel.

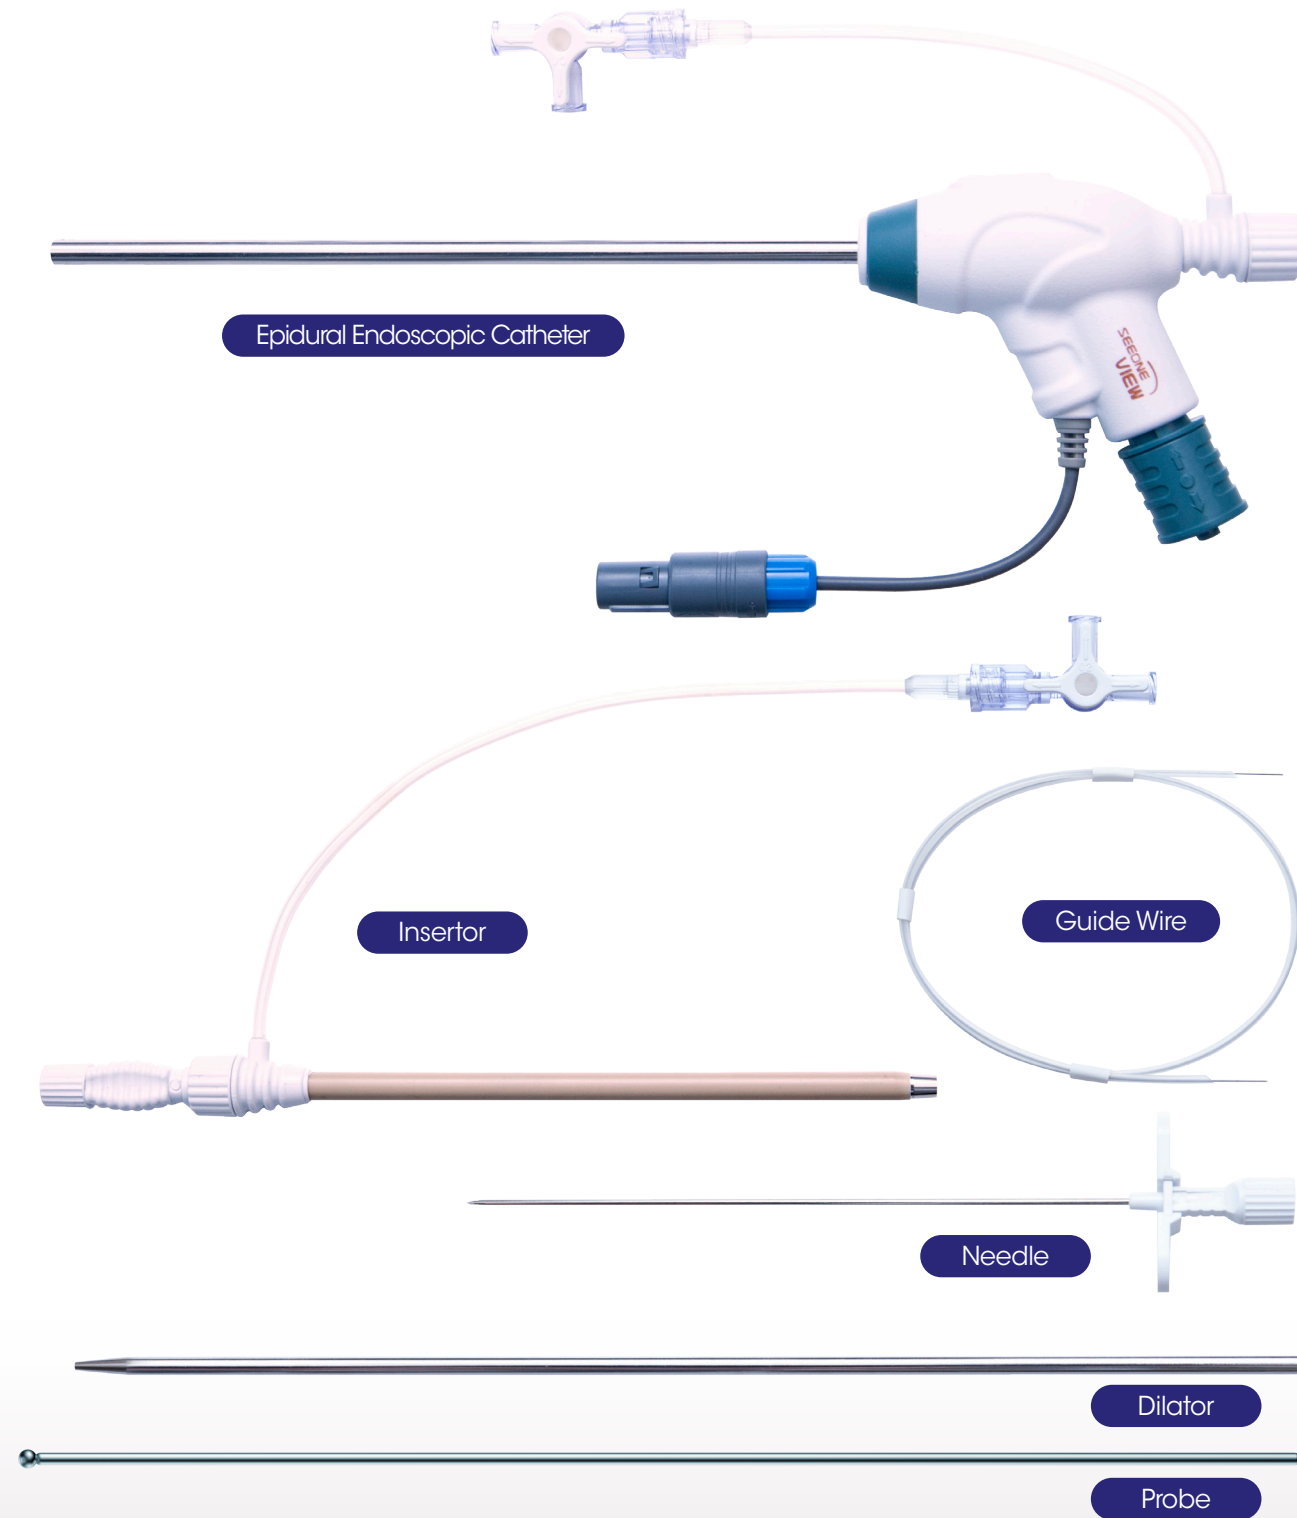

## Features



### High-Resolution

#### High Resolution Camera

The high-resolution enables precise diagnosis and surgical operation, with more rapid access to lesions and reducing surgery time

### Safe

#### Minimally invasive

Minimum incision to reduce pain and recovery time.

#### Accurate treatment with visualization and illumination

Provides superior images enabling more safe operation.

### Easy

#### Easy-to-use program

It uses a dedicated program


#### Easy-to-use ergonomic design

Ergonomic handle design easy to use

#### View device for illumination intensity control

Convenient for users to directly adjust illumination intensity on the view.

### View Light

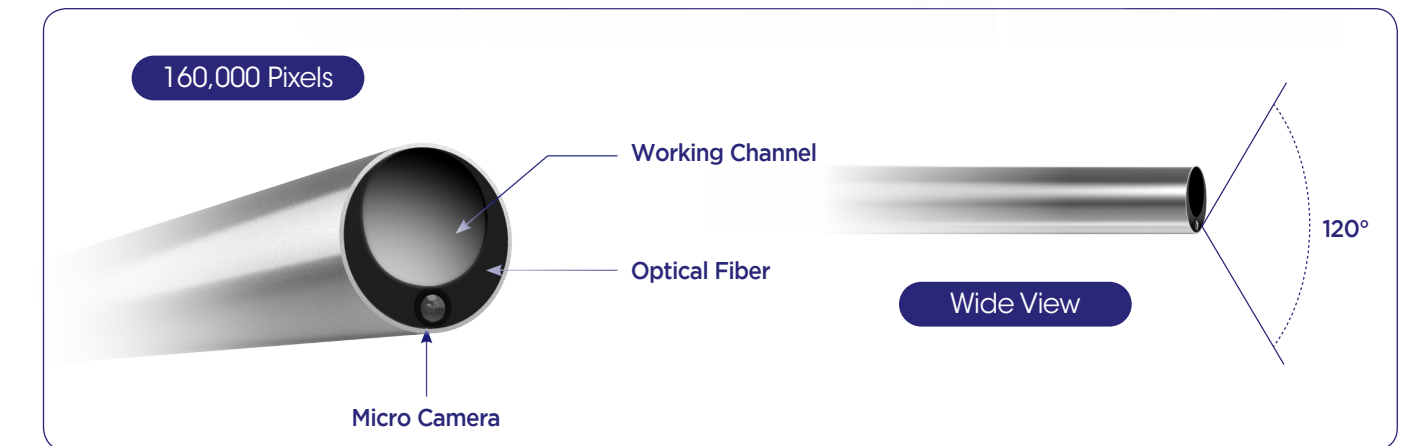

## Model Spec

Model Name	Catheter	Angle	Length	O.D	I.D	Guide Wire	Needle	Insertor	Dilator	Probe
SWS-EP-02	SWS-EC-02	5°	175	5.5	3.2	SWS-GW-01	SWS-ND-01	SWS-SH-01 SWS-SH-02	SWS-DI-01	SWS-HK-01
SWS-EP-03	SWS-EC-03	0°	175	4	1.8	SWS-GW-01	SWS-ND-01	SWS-SH-03 SWS-SH-04		SWS-HK-01
SWS-EP-04	SWS-EC-02	5°	175	5.5	3.2	SWS-GW-01	SWS-ND-01	SWS-SH-05 SWS-SH-02	SWS-DI-01	SWS-HK-01
SWS-EC-04	SWS-EC-04	12°	120	9	5.7	Reusable available				

## Optimal image quality

